


卷筒组参数

PARAMETERS OF DRUM GROUP

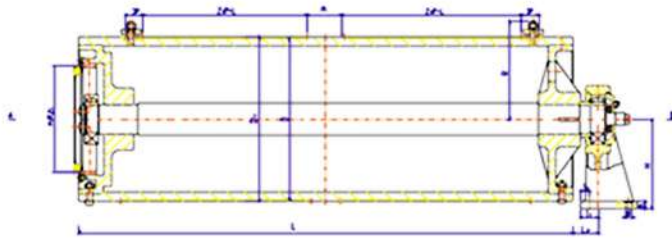

φ300卷筒组选用表

型号	D×L	(t)	(m)	p	m	D ₁	L ₁	L ₂	I ₁	I ₂	H	h	d	R	m ₁ ×z ₁
1	φ300×1500	5	24	12.7	100	308	17.5	100	50	30	210	30	22	187.5	3×56
2	φ300×1200	5	9	18	330	310	17.5	100	50	30	210	30	22	187.5	3×56
3	φ300×1000	5	16	12.5	38	308	17.5	100	50	30	210	30	22	187.5	3×56
4	φ300×1000	5	14	14	38	308	17.5	100	50	30	210	30	22	187.5	3×56
5	φ300×1500	3.2	22	12.7	150	308	17.5	100	50	30	210	30	22	187.5	3×56
6	φ300×1200	5	24	11	38	308	17.5	100	50	30	210	30	22	187.5	3×56

φ400卷筒组选用表

型号	D×L	(t)	(m)	p	m	D ₁	L ₁	L ₂	I ₁	I ₂	H	h	d	R	m ₁ ×z ₁
1	φ400×1800	5	30	16	150	409	10	100	50	30	210	30	22	240	4×56
		10	20		50										
2	φ400×1500	5	22	22	250	418	10	140	50	30	210	30	22	259	4×56
3	φ400×1500	5	30	12.7	150	409	10	100	50	30	210	30	22	240	4×56
4	φ400×1500	3.2	32	12.7	50	408	10	100	50	30	210	30	22	239	4×56
5	φ400×2000	3.2	64	16	250	409	10	100	50	30	210	30	22	250	4×56
6	φ400×2000	5	32	16	250	409	10	100	50	30	210	30	22	235	4×56
7	φ400×1000	5	16	16	48	409	10	100	50	30	210	30	22	248	4×56
8	φ400×1500	5	22	16	150	409	10	100	50	30	210	30	22	235	4×56
		10	16		50										
9	φ400×800	5	11	16	48	409	10	100	50	30	210	30	22	235	4×56
10	φ400×1500	3.2	43	16	250	409	10	100	50	30	210	30	22	235	4×56
11	φ400×2000	5	34	16	150	409	10	100	50	30	210	30	22	250	4×56
		10	24		50										
12	φ400×2500	5	46	16	50	409	10	100	50	30	210	30	22	235	4×56
		10	30												
13	φ400×2200	5	38	16	150	409	10	100	50	30	210	30	22	248	4×56
14	φ400×2500	5	44	16	150	409	10	100	50	30	210	30	22	248	4×56
15	φ400×2500	3.2	44	12.7	150	408	10	100	50	30	210	30	22	235	4×56
16	φ400×2500	5	40	16	150	409	10	100	50	30	210	30	22	235	4×56
17	φ400×2500	5	40	22	400	418	10	140	50	30	210	30	22	259	4×56

φ500卷筒组选用表

型号	D×L	(t)	(m)	P	m	D ₁	L ₁	L ₂	I ₁	I ₂	H	h	d	R	m ₁ ×z ₁
1	φ500×2000	15	22	20	120	512	45	100	60	30	260	30	22	316	6×56
		20	16												
2	φ500×1200	5	16	22	250	518	60	85	60	30	260	30	22	309	6×56
3	φ500×2500	20	22	20	120	512	45	145	60	30	260	30	22	316	6×56
4	φ500×2500	15	28	20	120	512	45	100	60	30	260	30	22	316	6×56
5	φ500×2500	16	30	20	50	512	60	85	60	30	260	30	22	316	6×56
		20	22		120										
6	φ500×3000	20	26	20	220	512	45	100	60	30	260	30	22	316	6×56
7	φ500×2500	10	38	16	70	509	45	100	60	30	260	30	22	297	6×56
8	φ500×3000	10	46	16	90	509	45	100	60	30	260	30	22	297	6×56
9	φ500×3500	20	32	20	150	512	45	100	60	30	260	30	22	316	6×56
10	φ500×1500	10	20	16	120	509	45	100	60	30	260	30	22	297	6×56
11	φ500×3800	15	43	20	400	512	45	100	60	30	260	30	22	316	6×56
		20	32		400										
12	φ500×2000	15	22	20	120	512	45	100	60	30	260	30	22	316	6×56
		20	16												
13	φ500×2200	10	38	28	50	512	45	100	60	30	260	30	22	316	6×56
14	φ500×2200	10	36	28	300	512	60	133	60	30	260	30	22	223	6×56
15	φ500×2000	10	24	28	50	524	60	133	60	30	260	30	22	233	6×56
16	φ500×2200	15	24	20	120	512	45	100	60	30	260	30	22	316	6×56
		20	18		120										
17	φ500×1200	10	12	28	70	524	60	85	60	30	260	30	22	322	6×56
18	φ500×1800	20	10	28	120	524	60	133	60	30	260	30	22	322	6×56
19	φ500×1800	10	20	28	300	524	60	133	60	30	260	30	22	322	6×56
20	φ500×3400	20	34	18	120	512	45	100	60	30	260	30	22	303	6×56
21	φ500×2800	20	22	20	420	512	45	100	60	30	260	30	22	316	6×56
22	φ500×1500	10	18	28	300	524	60	133	60	30	260	30	22	322	6×56
23	φ500×1685	16	14	20	105	512	45	100	60	30	260	30	22	316	6×56
24	φ500×1500	15	16	20	120	512	60	85	60	30	260	30	22	316	6×56
		20	12		120										
25	φ500×1200	16	12	20	60	512	45	100	60	30	260	30	22	316	6×56

φ650卷筒组选用表

型号	D×L	(t)	(m)	p	m	D ₁	L ₁	L ₂	I ₁	I ₂	H	h	d	R	m ₁ ×z ₁
1	φ650×2500	20	28	20	130	664	43	100	70	35	360	30	22	402	8×54
2	φ650×2000	30	17	24	150	664	43	100	70	35	360	30	22	402	8×54
3	φ650×1500	30	12	24	150	664	43	100	70	35	360	30	22	402	8×54
4	φ650×3200	30	30	24	150	664	43	100	70	35	360	30	22	402	8×54
5	φ650×2500	30	23	24	150	664	43	100	70	35	360	30	22	402	8×54
6	φ650×2300	32	20	24	150	664	43	100	70	35	360	30	22	402	8×54
7	φ650×2300	20	44	20	120	662	43	100	70	35	360	30	22	391	8×54
8	φ650×4700	50	26	28	150	664	43	100	70	35	360	30	22	402	8×54
9	φ650×1500	30	13	24	66	664	43	100	70	35	360	30	22	402	8×54
10	φ650×1500	30	12	24	150	664	43	100	70	35	360	30	22	402	8×54

φ800卷筒组选用表

型号	D×L	(t)	(m)	p	m	D ₁	L ₁	L ₂	I ₁	I ₂	H	h	d	R	m ₁ ×z ₁
1	φ800×2500	50	18	28	250	816	87.5	100	70	35	420	35	26	478	10×48
2	φ800×2000	50	12	28	350	816	87.5	100	70	35	420	35	26	478	10×48
3	φ800×3800	75	26	32	230	818	87.5	100	70	35	420	35	26	489	10×48
4	φ800×2000	20	20	44	400	840	97	145	70	30	360	30	22	506	10×48
5	φ800×4200	80	28	32	370	818	87.5	100	70	35	420	35	26	477	10×48
6	φ800×2500	30	44	24	120	814	43	100	70	35	420	35	26	456.5	8×54
7	φ800×3000	50	20	28	350	816	87.5	100	70	35	420	35	26	478	10×48
8	φ800×1800	20	26	36	400	822	92	145	70	30	360	30	22	486	8×54
9	φ800×2000	30	22	24	80	815	43	100	70	35	420	35	26	478	8×54
10	φ800×3200	30	26	24	150	814	43	100	70	35	420	35	26	478	8×54
11	φ800×3600	50	28	28	200	816	87.5	100	70	35	420	35	26	478	10×48
12	φ800×4500	60	33	30	300	818	87.5	100	70	35	420	35	26	482	10×48

φ1000卷筒组选用表

型号	D×L	(t)	(m)	p	m	D ₁	L ₁	L ₂	I ₁	I ₂	H	h	d	R	m ₁ ×z ₁
1	φ1000×3000	50	28	28	230	1016	87.5	100	70	70	460	30	26	578	10×48
2	φ1000×2500	50	22	28	280	1016	87.5	100	70	35	420	35	26	578	10×48
3	φ1000×2000	50	18	28	100	1016	87.5	100	70	35	420	35	26	578	10×48
4	φ1000×2000	40	22	28	150	1016	87.5	100	70	35	420	35	26	580	10×48
5	φ1000×2000	57	18	32	100	1018	40	300	125	50	500	50	46	589	10×54
6	φ1000×3500	50	32	28	280	1016	87.5	100	70	35	420	35	26	578	10×48